

**stason.org**

Articles
Development
Books
Teaching
Photography
Bits and Pieces

TULARC

Contact Us
Site Map

Search

Favorites

Free Online Books
Alternative Health


◀ Prev Up Next ▶

P6I440BX/B1 Motherboard Settings and Configuration

QDI COMPUTER, INC.

P6I440BX/B1

Device Type	Mainboard
Processor	Pentium II
Processor Speed	233/266/300/333/350/400/450MHz
Chip Set	Intel 440BX
Video Chip Set	None
Maximum Onboard Memory	384MB (SDRAM supported)
Maximum Video Memory	None
Cache	256/512KB (located on Pentium II CPU)
BIOS	Award
Dimensions	305mm x 190mm
I/O Options	32-bit PCI slots (4), floppy drive interface, green PC connector, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), IR connector, USB connectors (2), ATX power connector, AGP slot, SB-link connector, wake on LAN connector, wake on modem connector

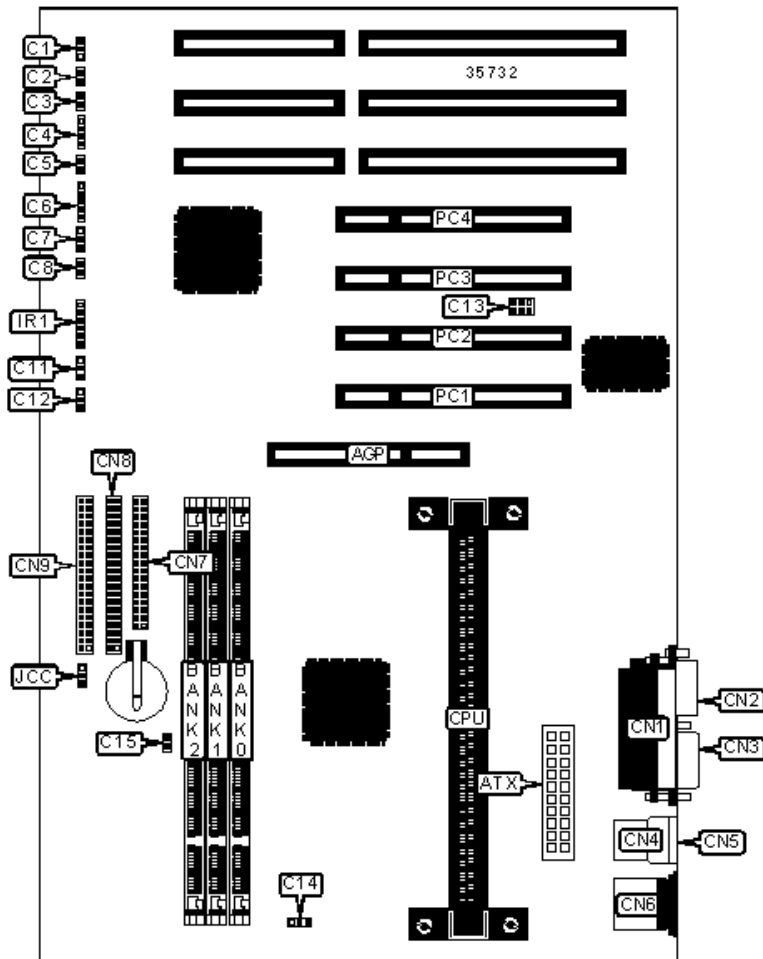

CONNECTIONS			
Purpose	Location	Purpose	Location
AGP slot	AGP	CPU fan power	C14
ATX power connector	ATX	Chassis intrusion connector	C15
Chassis fan power	C1	Parallel port	CN1
IDE interface LED	C2	Serial port 1	CN2
Reset switch	C3	Serial port 2	CN3
Speaker	C4	USB connector 1	CN4
Soft off power supply	C5	USB connector 2	CN5
Power LED & keylock	C6	PS/2 mouse port	CN6
Green PC LED	C7	Floppy drive interface	CN7
Green PC connector	C8	IDE interface 2	CN8
Wake on LAN connector	C11	IDE interface 1	CN9
Wake on modem connector	C12	IR connector	IR1
SB-link connector	C13	32-bit PCI slots	PC1 – PC4

USER CONFIGURABLE SETTINGS			
Function		Label	Position
»	CMOS memory normal operation	JCC	Pins 2 & 3 closed
	CMOS memory clear	JCC	Pins 1 & 2 closed

DIMM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
8MB	(1) 1M x 64	None	None
16MB	(1) 2M x 64	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None
24MB	(1) 2M x 64	(1) 1M x 64	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 4M x 64	None	None
32MB	(1) 2M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 2M x 64	(1) 2M x 64	None
40MB	(1) 4M x 64	(1) 1M x 64	None
40MB	(1) 2M x 64	(1) 2M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 1M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 2M x 64	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64

DIMM CONFIGURATION (CON'T)			
Size	Bank 0	Bank 1	Bank 2
56MB	(1) 4M x 64	(1) 2M x 64	(1) 1M x 64
64MB	(1) 8M x 64	None	None
64MB	(1) 4M x 64	(1) 2M x 64	(1) 2M x 64
64MB	(1) 4M x 64	(1) 4M x 64	None
72MB	(1) 8M x 64	(1) 1M x 64	None
72MB	(1) 4M x 64	(1) 4M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 1M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 2M x 64	None

80MB	(1) 4M x 64	(1) 4M x 64	(1) 2M x 64
88MB	(1) 8M x 64	(1) 2M x 64	(1) 1M x 64
96MB	(1) 8M x 64	(1) 2M x 64	(1) 2M x 64
96MB	(1) 8M x 64	(1) 4M x 64	None
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
104MB	(1) 8M x 64	(1) 4M x 64	(1) 1M x 64
112MB	(1) 8M x 64	(1) 4M x 64	(1) 2M x 64
128MB	(1) 16M x 64	None	None
128MB	(1) 8M x 64	(1) 4M x 64	(1) 4M x 64
128MB	(1) 8M x 64	(1) 8M x 64	None
136MB	(1) 16M x 64	(1) 1M x 64	None
136MB	(1) 8M x 64	(1) 8M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 2M x 64	None
144MB	(1) 8M x 64	(1) 8M x 64	(1) 2M x 64
152MB	(1) 16M x 64	(1) 2M x 64	(1) 1M x 64
160MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
160MB	(1) 16M x 64	(1) 4M x 64	None
160MB	(1) 8M x 64	(1) 8M x 64	(1) 4M x 64
168MB	(1) 16M x 64	(1) 4M x 64	(1) 1M x 64
176MB	(1) 16M x 64	(1) 4M x 64	(1) 2M x 64
192MB	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
192MB	(1) 16M x 64	(1) 8M x 64	None
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
200MB	(1) 16M x 64	(1) 8M x 64	(1) 1M x 64

DIMM CONFIGURATION (CON'T)			
Size	Bank 0	Bank 1	Bank 2
208MB	(1) 16M x 64	(1) 8M x 64	(1) 2M x 64
224MB	(1) 16M x 64	(1) 8M x 64	(1) 4M x 64
256MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64

Note: Board accepts SDRAM memory.

CACHE CONFIGURATION

Note: 256KB/512KB cache is located on the Pentium II CPU.

Share and Enjoy

Bookmark this story so others can enjoy it:



Tags

[P6I440BX/B1](#), [motherboard](#), [processor](#), [socket](#), [pentium](#), [pentium pro](#), [celeron](#), [powerpc](#), [alpha](#), [8088](#), [8086](#), [286](#), [386](#), [486](#), [configuration](#), [RAM](#), [DRAM](#), [floppy](#), [jumper](#), [connections](#)

Last modified Thu Oct 21 20:59:59 2010

Created by [Stas Bekman](#) and his [DocSet](#).

[[Privacy Policy](#)] [[Copyright](#)] [[About Us](#)] [[Advertise on This Site](#)] [[Search](#)]